

CPVC Pipe & Threaded Fittings


CPVC Fittings

45° Elbow



Sizes	DN20 thru DN80 (3/4" thru 3")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Manufactured with Lubrizol's BLAZEMASTER® compound ■ Produced from BlazeMaster® thermoplastic compound, RAPID RESPONSE CPVC fittings are designed exclusively for use in wet and dry pipe automatic fire sprinkler systems. ■ Our CPVC is easier to install than traditional steel components, while providing superior heat resistance and strength compared to traditional CPVC and PVC fitting materials.

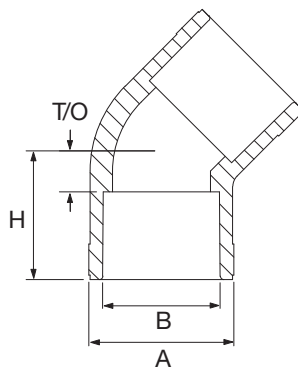

CPVC 45° Elbow											
Part No.	Size		A mm	H mm	T/O mm	Weight kg	Approval Listings				
	DN	In.					LPCB	FM	UL	MEA	NSF
80050	20	3/4"	33	30	9	0.036	✓	✓	✓	✓	✓
80051	25	1"	40	33	9	0.050	✓	✓	✓	✓	✓
80052	32	1-1/4"	50	47	20	0.091	✓	✓	✓	✓	✓
80053	40	1-1/2"	59	48	12	0.141	✓	✓	✓	✓	✓
80054	50	2"	72	59	19	0.254	✓	✓	✓	✓	✓
90055	65	2-1/2"	89	62	19	0.404	✓	✓	✓	✓	✓
90056	80	3"	106	75	25	0.504	✓	✓	✓	✓	✓