

CPVC Pipe & Threaded Fittings


CPVC Fittings

Coupling Adaptor, Slip x Groove



Sizes	DN32 thru DN80 (1-1/4" thru 3")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Manufactured with Lubrizol's BLAZEMASTER® compound ■ Produced from BlazeMaster® thermoplastic compound, RAPID RESPONSE CPVC fittings are designed exclusively for use in wet and dry pipe automatic fire sprinkler systems. ■ Our CPVC is easier to install than traditional steel components, while providing superior heat resistance and strength compared to traditional CPVC and PVC fitting materials.

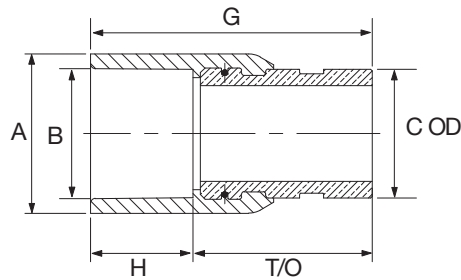

Part No.	Size				A mm	G mm	H mm	T/O mm	Weight kg	Approval Listings				
	DN		In.							LPCB	FM	UL	MEA	NSF
	D	B	D	B										
80160	32	1-1/4"	32	42.2	52	93	34	59	0.354	✓	✓	✓	✓	✓
80161	40	1-1/2"	40	48.3	59	95	37	58	0.431	✓	✓	✓	✓	✓
80162	50	2"	50	60.3	72	98	40	58	0.644	✓	✓	✓	✓	✓
80163	65	2-1/2"	65	73.0	87	107	49	58	1.034	✓	✓	✓	✓	✓
80169	65	2-1/2"	65	76.1	91	107	49	58	1.155	✓	✓	✓	✓	✓
80164	80	3"	80	88.9	105	110	52	58	1.361	✓	✓	✓	✓	✓