

CPVC Pipe & Threaded Fittings


CPVC Fittings

Bush Reducing, Spigot x Slip



Sizes	DN20 x DN25 thru DN80 x DN65 (3/4" x 1" thru 3" x 2-1/2")
Approvals	UL, C-UL Listed & FM, MEA, NSF, & LPCB Approved
Rated Pressure	12,1 bar (175 psi)
Maximum Temperature Rating	65°C (150°F).
Tech Data Sheet	TFP1915 and Installation Handbook - IH-1900

Manufactured with Lubrizol's BLAZEMASTER® compound ■ Produced from BlazeMaster® thermoplastic compound, RAPID RESPONSE CPVC fittings are designed exclusively for use in wet and dry pipe automatic fire sprinkler systems. ■ Our CPVC is easier to install than traditional steel components, while providing superior heat resistance and strength compared to traditional CPVC and PVC fitting materials.

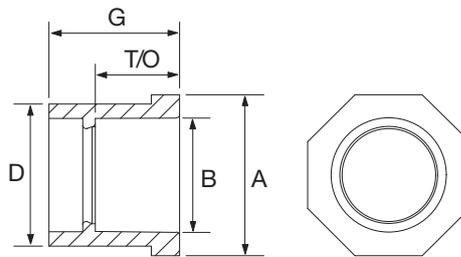

CPVC Bush Reducing, Spigot x Slip													
Part No.	Size				A mm	G mm	T/O mm	Weight kg	Approval Listings				
	DN		In.						LPCB	FM	UL	MEA	NSF
	D	B	D	B									
80200	25	20	1"	3/4"	38	30	11	0.018	✓	✓	✓	✓	✓
80201	32	20	1-1/4"	3/4"	47	32	12	0.050	✓	✓	✓	✓	✓
80202	32	25	1-1/4"	1"	47	32	8	0.054	✓	✓	✓	✓	✓
80203	40	20	1-1/2"	3/4"	53	42	15	0.072	✓	✓	✓	✓	✓
80204	40	25	1-1/2"	1"	53	42	12	0.063	✓	✓	✓	✓	✓
80205	40	32	1-1/2"	1-1/4"	53	42	9	0.077	✓	✓	✓	✓	✓
80206	50	20	2"	3/4"	66	47	20	0.122	✓	✓	✓	✓	✓
80207	50	25	2"	1"	66	47	17	0.118	✓	✓	✓	✓	✓
80208	50	32	2"	1-1/4"	66	47	14	0.109	✓	✓	✓	✓	✓
80209	50	40	2"	1-1/2"	66	47	11	0.086	✓	✓	✓	✓	✓
80215	65	25	2-1/2"	1"	79	54	24	0.190	✓	✓	✓	✓	✓
80214	65	32	2-1/2"	1-1/4"	79	54	20	0.204	✓	✓	✓	✓	✓
80213	65	40	2-1/2"	1-1/2"	79	54	18	0.209	✓	✓	✓	✓	✓
80211	65	50	2-1/2"	2"	79	54	15	0.152	✓	✓	✓	✓	✓
80210	80	50	3"	2"	96	59	20	0.387	✓	✓	✓	✓	✓
80212	80	65	3"	2-1/2"	96	59	13	0.213	✓	✓	✓	✓	✓